



Weatherproofing Coaxial Cable Connections

DXE-TECHTIP-WPCC Rev 2a



© DX Engineering 2012
P.O. Box 1491 · Akron, OH 44309-1491 USA
Phone: (800) 777-0703 · Tech Support and International: (330) 572-3200
Fax: (330) 572-3279 · E-mail: DXEngineering@DXEngineering.com

Weatherproofing Your Coaxial Cable Connections

This DX Engineering Tech-Tip will show you the preferred way to reliably weatherproof your coaxial connections.

Over the years many different methods have been used to weatherproof coaxial cable connections.

Some worked, some did not. Once water or condensation enters your coaxial cable, it will ruin it, or worse yet, cause shorting or high SWR conditions which could lead to permanent damage to your transmitter.

One type of coaxial sealing material is a gummy tar like substance that you wrap around the coaxial connection. This gummy substance works pretty good, except when you try to remove it for maintenance or coaxial cable replacement, it can cause further problems. The gummy substance just doesn't come off cleanly and small bits of it may remain in the threads of PL-259's or SO-239's. These small bits of material are mini-insulators, and could cause intermittent operation.

The method described in this DX Engineering Tech-Tip uses a combination of two types of tape which not only protect your coaxial connection, but also allow easy removal for future maintenance.

The two products, available from DX Engineering, used in this Tech-Tip are:

DXE-3M2155 - 3M Temflex™ 2155 Rubber Splicing Tape.

Conformable self-fusing rubber electrical insulating tape. It is designed for low voltage electrical insulating and moisture sealing applications. For outdoor use, it should be protected from UV deterioration with an overwrap of **TRM-06132**



TRM-06132 - Scotch® Super 33+.

Highly conformable super stretchy tape for all weather applications. This tape provides flexibility and easy handling for all around performance. It also combines PVC backing with excellent electrical insulating properties to provide primary electrical insulation for splices up to 600V and protective jacketing.



These tapes can be used indoors or outdoors. When used outdoors the temperature should be above freezing, and if it's raining, keep the assembly you are wrapping covered and dry while applying the tapes. Any airborne moisture such as fog, rain and snow may cause the tape to not stick properly, so take adequate precautions to protect the assembly you are weatherproofing.


Additionally, the coaxial cable and connectors should be clean and free of any moisture, dirt or other residues.

1. The only tool you will need for this procedure is a pair of scissors. This example is using two pieces of coaxial cable with PL-259 connectors that are joined together with a short UHF barrel connector. This same method may be used on any connection you are weatherproofing.



2. Cut a piece of **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape long enough to complete the job you are doing. If the length you cut is too short, that's okay. You can add more where needed and it will not compromise the weatherproofing.

In this example a 15" length of the **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape was used to weatherproof two PL-259's tightly connected together with a short UHF barrel connector.

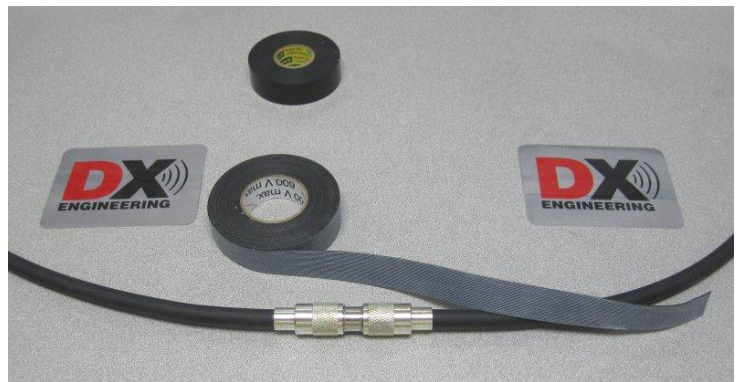

3. The **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape has a protective backing material so the tape will not stick to itself when on the roll. As shown below, peel this protective backing off of the length that you cut from the roll.



- Starting at one end, hold the end of the cut length of **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape in place about one inch before the end of the PL-259 and stretch it out until the width of the tape is about 50% as shown below.



Starting



Stretched while overlapping wraps

- While keeping the **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape stretched, wrap the tape around the assembly and overlap the previous wrap by about 50%. Keep going until the complete assembly is covered, and go an extra inch beyond.

If the length you cut is too short for the entire assembly, that's okay. You can add more starting where the one piece ended and then continue on in the same manner described above.



This completes the first layer wrap. **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape requires an added wrap of **TRM-06132** - Scotch® Super 33+ tape for UV protection.

- Starting about one inch before the previously installed 3M Temflex™ 2155 Rubber Splicing Tape start a wrap of the **TRM-06132 - Scotch® Super 33+** tape. While wrapping, over lap the previous wrap by about 50%. Use firm pressure while wrapping to ensure the tape is on flat and there are no wrinkles or open spots.

Keep wrapping the Scotch® Super 33+ tape until you are about an inch past the end of the previously installed 3M Temflex™ 2155 Rubber Splicing Tape.



Using these quality products and this method, the completed weatherproofing will be complete and reliable.



Removal of Weatherproofing

There comes a time when you have to separate the previously weatherproofed coaxial cable connections for maintenance or some other reason. This is when you will be glad you used the above method to put on the weatherproofing!

1. Carefully cut the weatherproofing as shown. Be careful not to cut the coaxial cable, or your fingers. Peel the weatherproofing off and the assembly will look like new.



Looking at the removed weatherproofing, you can see the **DXE-3M2155** - 3M Temflex™ 2155 Rubber Splicing Tape conformed to your assembly and fully protected the assembly when it had been properly applied as described in this Tech-Tip.

Technical Support

If you have questions about this product, or if you experience difficulties during the installation, contact DX Engineering at (330) 572-3200. You can also e-mail us at:

DXEngineering@DXEngineering.com

Warranty

All products manufactured by DX Engineering are warranted to be free from defects in material and workmanship for a period of one (1) year from date of shipment. DX Engineering's sole obligation under these warranties shall be to issue credit, repair or replace any item or part thereof which is proved to be other than as warranted; no allowance shall be made for any labor charges of Buyer for replacement of parts, adjustment or repairs, or any other work, unless such charges are authorized in advance by DX Engineering. If DX Engineering's products are claimed to be defective in material or workmanship, DX Engineering shall, upon prompt notice thereof, issue shipping instructions for return to DX Engineering (transportation-charges prepaid by Buyer). Every such claim for breach of these warranties shall be deemed to be waived by Buyer unless made in writing. The above warranties shall not extend to any products or parts thereof which have been subjected to any misuse or neglect, damaged by accident, rendered defective by reason of improper installation, damaged from severe weather including floods, or abnormal environmental conditions such as prolonged exposure to corrosives or power surges, or by the performance of repairs or alterations outside of our plant, and shall not apply to any goods or parts thereof furnished by Buyer or acquired from others at Buyer's specifications. In addition, DX Engineering's warranties do not extend to other equipment and parts manufactured by others except to the extent of the original manufacturer's warranty to DX Engineering. The obligations under the foregoing warranties are limited to the precise terms thereof. These warranties provide exclusive remedies, expressly in lieu of all other remedies including claims for special or consequential damages. SELLER NEITHER MAKES NOR ASSUMES ANY OTHER WARRANTY WHATSOEVER, WHETHER EXPRESS, STATUTORY, OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS, AND NO PERSON IS AUTHORIZED TO ASSUME FOR DX ENGINEERING ANY OBLIGATION OR LIABILITY NOT STRICTLY IN ACCORDANCE WITH THE FOREGOING.

©DX Engineering 2012

DX Engineering®, DXE®, DX Engineering, Inc.®, Hot Rodz®, Maxi-Core®, DX Engineering THUNDERBOLT™, DX Engineering Yagi Mechanical®, EZ-BUILD®, TELREX® and Gorilla Grip® Stainless Steel Boom Clamps, are trademarks of PDS Electronics, Inc. No license to use or reproduce any of these trademarks or other trademarks is given or implied. All other brands and product names are the trademarks of their respective owners.

Specifications subject to change without notice.